


**Fiberglass rods  $\varnothing$  3 mm – Set**

2 x 0,41 m, RTG  $\varnothing$  6 mm thread, stainless steel  
Item no. **20457**

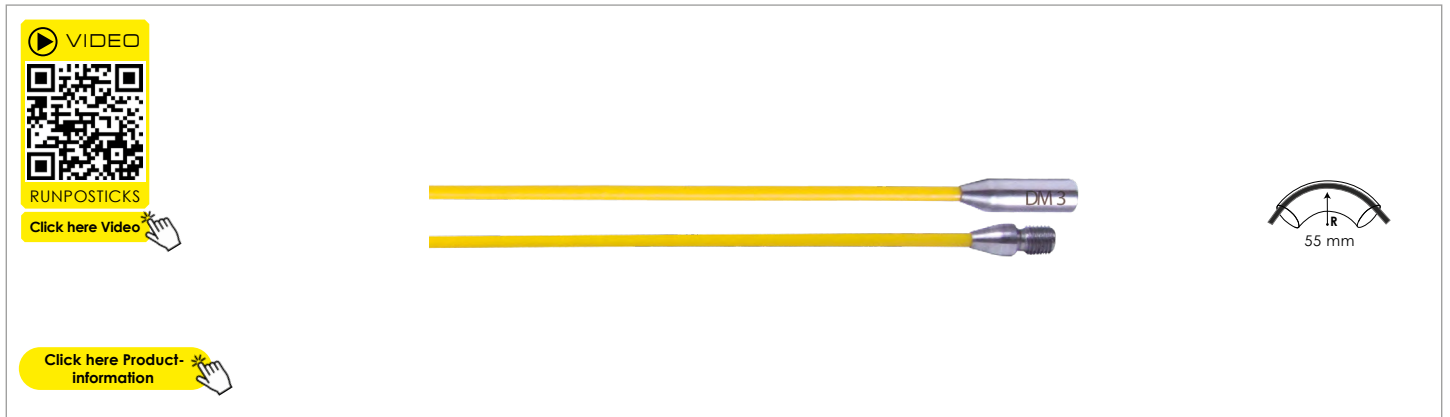

DATA	
ITEM NO.	<b>20457</b>
DIAMETER	$\varnothing$ 3 mm
WEIGHT	0,024 kg
DIMENSIONS	L 510 mm x DM 7 mm
THREAD	RTG $\varnothing$ 6 mm
EAN-CODE	9120045474848

- ADVANTAGES**
- Guide probe for narrow bends
  - Bending radius 55 mm
  - Standard RTG  $\varnothing$  6 mm thread

**DESCRIPTION**

The Fiberglass rod  $\varnothing$  3 mm - length 0,41 m is mainly used in combination with the RUNPOSTICKS as an additional guide probe. The uniform RUNPOTEC RTG  $\varnothing$  6 mm thread allows a wide variety of combinations. All accessories can be screwed on without an additional adapter.

**Optimal field of application:** suspended ceilings, cable shafts, hollow walls, rewiring for non-guided cables, underfloor shafts, bushings etc...

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.RUNPOTEC.com](http://www.RUNPOTEC.com).

**Scope of supply:** 2 x Fiberglass rod  $\varnothing$  3 mm - length: 0,41 m

**INFORMATION**

Use with:

**RUNPOSTICKS Comfort-package**  
Item no. 10020

**RUNPOSTICKS Standard-package**  
Item no. 10016

[Click here Product-information](#)