

GF6 Profi-Set Fiberglass rod Ø 6 mm with meter counter

for pipe diameter 40 - 100 mm, incl. double run-out system

Item no.: **10059** | **10061** | **10063** | **10065**



VIDEO
GF6
Click here Video

KG 320

Click here Productinformation


- Ergonomic holding and carrying handle
- RG7 - Guiding head with front thread and eyelet incl. swivel
- Lateral parking brake
- Double run-out system, quick outlet and automatic run-out brake
- Integrated digital meter counter - m/ft
- Extendable standing feet and storage compartment incl. accessories

Beginning: RG7 - Guiding head with swivel Ø 7 mm, RTG Ø 6 mm thread, screwed to strand

Ending: Ending joint, stainless steel, RTG Ø 6 mm thread

Attention! Electric conductive

Extendable standing feet

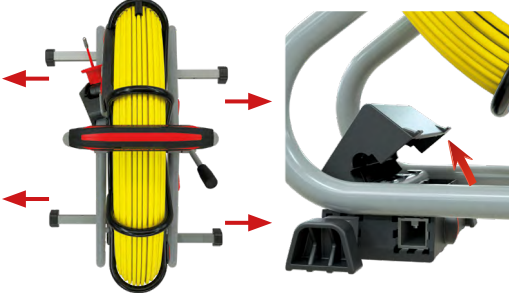


Position: Quick run-out



Position: Automatische Run-out brake



Symbolic images

Rod	rec. pipe diameter Ø	Bending radius w. e. joint	Bending radius rod	Breaking load	Total breaking load
Ø					
6 mm	40 - 100 mm	168 mm	80 mm	2200 kg	320 kg

DATA

ITEM NO.:	10059	10061	10063	10055
LENGTH	40 m	50 m	60 m	80 m
WEIGHT	9,30 kg	8,83 kg	9,47 kg	9,38 kg
MATERIAL ROD	Fiberglass core with PP sheath			
BENDING RADIUS	168 mm			
PIPE Ø	optimal for tube diameter 40 - 100 mm			
DIMENSION	L x 550 x W 250 x H 655 mm			
TOTAL BREAKING LOAD	320 kg			

DESCRIPTION

GF6 Professional Set – Fibre-optic rod Ø 6 mm with robust steel reel (KTL/ powder-coated) Ø 530 mm, integrated digital metre counter, RUNPOTEC RTG thread Ø 6 mm and including accessories (see scope of delivery). The integrated digital metre counter enables precise length control with a switchable display in metres or feet. The new dual-release system can be quickly switched between rapid release (lower position) and automatic release with an automatic release brake (upper position) simply by pulling out the red control knob, thereby enabling controlled and efficient working. The additional locking brake secures the reel and prevents it from turning unintentionally. Extendable feet ensure excellent stability, whilst the integrated storage compartment provides practical space for accessories. The fibreglass rod has a breaking load of up to 2,200 kg. The total breaking load is 320 kg. Ideal for use with pipe diameters from 40 mm to 100 mm.

Scope of supply: 1 x GF 6 fiberglass rod Ø 6 mm Profi-Set, stainless steel ending joint on both sides (start/end), 1 x steel reel Ø 530 mm incl. double run-out system, extendable feet and storage compartment, additional accessories: 1 x RG7 RUNPOGLIDER with thread and swivel, 2 x ending joint, 1 x coupling joint, 1 x shackle, 1 x special glue, 1 x roller, 1 x battery CR2032

ADVANTAGES

- Incl. digital meter counter
- Double run-out system (automatic run-out brake and fast run-out)
- Additional parking brake
- Fiberglass rod breaking load 2200 kg
- Total breaking load 320 kg
- Bending radius with ending joint 168 mm
- Bending radius only rod 80 mm

INFORMATION

Compatible with:

RC2 Inspection camera
50 m - Item no.: 10141



RC3 Inspection camera (digital)
15 m - Item no. 10214

